


FMR600 平式系統

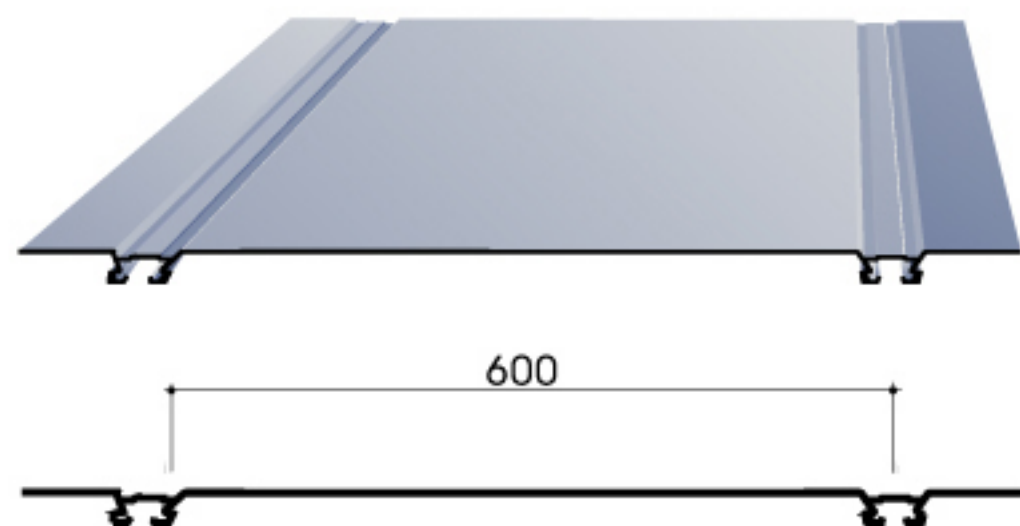


特點

- 無螺栓暴露型 特殊搭接處排水
- 可與各式隔熱材配合施工
- 斷熱耐火隔音材舒康ER.GR熱融成型
- 可彎弧加工流水方向不搭接
- 適用於工業與公共建築

設計

- 豎鋼桁需有硬質下襯材
- 洩水坡度可達5/100

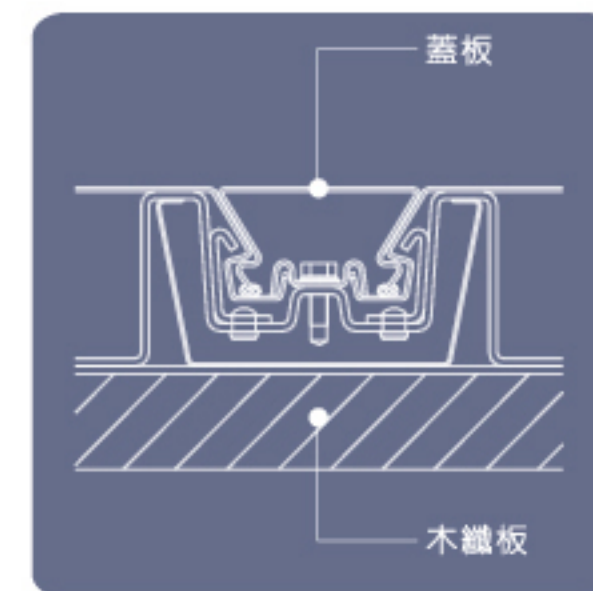

基材 BASE METAL / 表面處理 COATING		板厚 t (mm)							
		0.4	0.5	0.6	0.7	0.8	1.0	1.2	
鋁板	發色壓紋鋁板 Anodized stucco embossed aluminum			●	●	●	●	●	
	氟碳樹脂彩鋁板 PVDF color coated aluminum			●	●	●	●	●	
不銹鋼板	原色不銹鋼板 SUS304/SUS S16 stainless	●	●	●		●			
	超耐候不銹鋼板 U22 super stainless	●	●	●		●			
	氟碳樹脂彩色不銹鋼板 PVDF color coated stainless	●	●	●		●			
	鍍銅不銹鋼板 Copper coated stainless	●	●	●		●			
鋼板	耐候鍍鋁鋼板 Weather-Resistant alu. coated		●	●		●			
	聚酯彩鋼板 Polyester color coated		●	●		●			
	矽樹脂改良聚酯彩鋼板 S.M.P. color coated		●	●		●			
	著色玻璃纖維加強聚酯彩色鋼板 Glassfiber Pigmented Polyester color coated		●	●		●			
	氟碳樹脂彩鋼板 PVDF color coated		●	●		●			
	超耐候彩鋼板 Super Weather-Resistant color coated		●	●		●			