


RL430 搭接系統

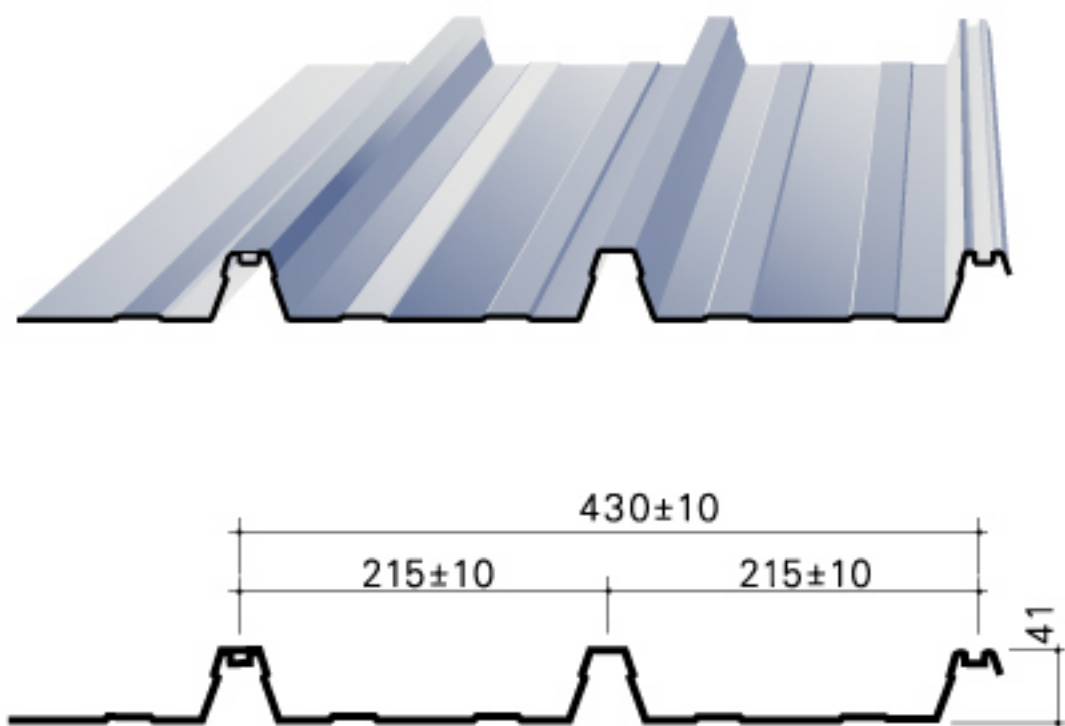

特點

- 可與各式隔熱材配合施工
- 斷熱耐火隔音材舒康ER-GR熱融成型
- 適用於工業與公共建築

設計

- 洩水坡度不小於5/100
- 豎鋼桁間距80cm



基材 BASE METAL / 表面處理 COATING		板厚 t (mm)						
		0.4	0.5	0.6	0.7	0.8	1.0	1.2
鋁板	發色壓紋鋁板 Anodized stucco embossed aluminum				●	●		
	氟碳樹脂彩鋁板 PVDF color coated aluminum				●	●		
鋼板	矽樹脂改良聚酯彩鋼板 S.M.P. color coated		●	●				
	著色玻璃纖維加強聚酯彩色鋼板 Glassfiber pigmented polyester color coated		●	●				
	氟碳樹脂彩鋼板 PVDF color coated		●	●				
	超耐候彩鋼板 Super weather-resistant color coated		●	●				
	氟碳樹脂彩鋼板 PVDF color coated		●	●				
	超耐候彩鋼板 Super weather-resistant color coated		●	●				