



SL480 扣合型系統

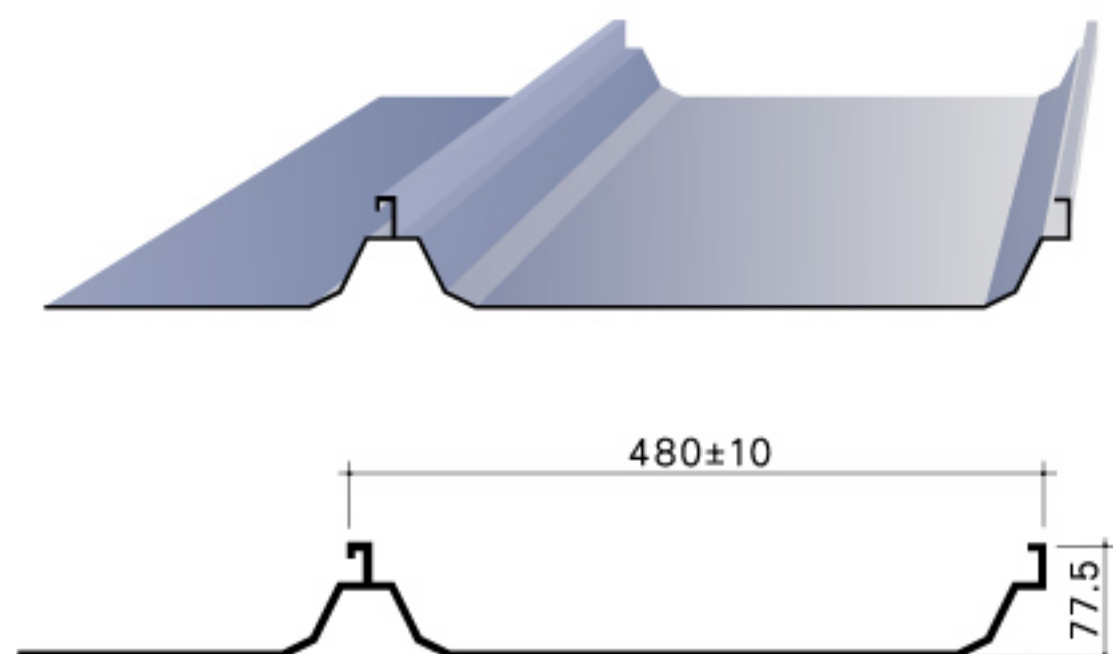

特點

- 無螺栓暴露型/STANDING SEAM TECHNIQUE
- 可與各式隔熱材配合施工
- 斷熱耐火隔熱材舒康ER.GR熱融成型
- 適用於商業與公共建築

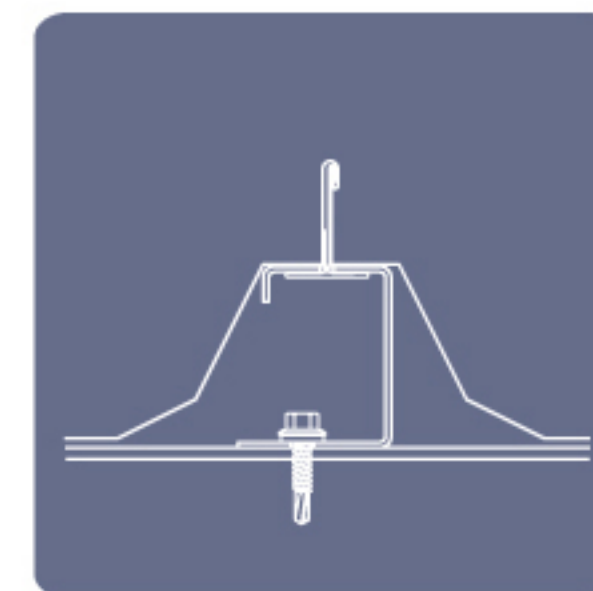

基材 BASE METAL / 表面處理 COATING		板厚 t (mm)						
		0.4	0.5	0.6	0.7	0.8	1.0	1.2
鋁板	發色壓紋鋁板 Anodized stucco embossed aluminum				●	●		
	氟碳樹脂彩鋁板 PVDF color coated aluminum				●	●		
不銹鋼板	原色不銹鋼板 SUS304/SUS S16 stainless	●	●					
	超耐候不銹鋼板 U22 super stainless	●	●					
	氟碳樹脂彩色不銹鋼板 PVDF color coated stainless	●	●					
	鍍銅不銹鋼板 Copper coated stainless	●	●					
鋼板	耐候鍍鋁鋼板 Weather-Resistant alu. coated		●	●				
	聚酯彩鋼板 Polyester color coated		●	●				
	矽樹脂改良聚酯彩鋼板 S.M.P. color coated		●	●				
	著色玻璃纖維加強聚酯彩色鋼板 Glassfiber Pigmented Polyester color coated		●	●				
	氟碳樹脂彩鋼板 PVDF color coated		●	●				
	超耐候彩鋼板 Super Weather-Resistant color coated		●	●				